


HOSE CADDY

Gorlitz portable hose caddy or dolly allows the operator to take the unit inside a building while the jetter stays outside. They can also be used to extend the reach of any jetter.

Gorlitz portable hose caddy is provided with a divided reel to store two different size hoses if needed. Maximum hose capacities are 100 feet of trap hose and 150 feet of 1/4" small jetter hose. Caddy includes protective rubber feet, swivel, shutoff valve and quick disconnect fitting. Maximum working pressure is 2000 psi. Weight: 35 lbs. (without hoses)

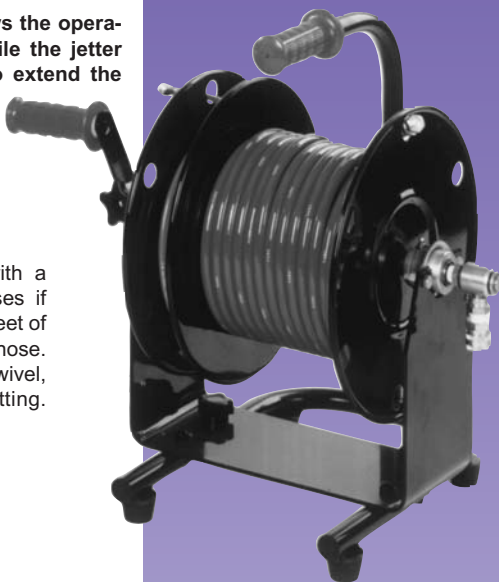

JT 109

CADDY PICTURED WITH OPTIONAL HOSES

HOSE DOLLY

Gorlitz hose dolly is equipped with a large capacity reel capable of storing over 300 feet of 3/8" jetter hose. The reel is fitted with one quick disconnect fitting, stainless steel swivel and shutoff valve, pressure gauge and adjustable reel brake.

The low profile frame is designed with an extendible handle to lock in the upright position for transportation and lowers to reduce storage space. Dolly is provided with pneumatic tires and protective rubber feet. Maximum working pressure is 4000 psi.

Weight: 75 lbs. (without hose)



JT 110

Gorlitz's jetting hoses are recognized for their abrasive resistant cover, smooth bore, chemical resistance and non-metallic properties. Most important, they are lightweight and offer great flexibility when under pressure.

Gorlitz's 1/8" diameter trap hose is recommended for 1 1/2" to 3" diameter drains. Both ends are equipped with rigid pipe thread fittings.



Gorlitz's small 1/4" diameter jetter hose is provided with one rigid and one swivel pipe thread fitting. Suggested applications are from 2" to 4" diameter pipes.



Gorlitz's medium 3/8" diameter jetter hose is recommended to clear lines from 4" to 8" diameter. Includes one rigid and one swivel pipe thread fitting.



Gorlitz's large 1/2" diameter jetter hose will clear main lines from 4" in diameter. Each hose includes one swivel and one rigid pipe thread fitting.



All Gorlitz jetter hoses are listed by their inside diameters and are equipped with standard National Pipe Thread fittings. They are also available in different lengths upon requests.

ROTATING NOZZLES

Gorlitz's rotating nozzles are recommended for their superior cleaning power. Applications include the cutting of grease, sludge, residues and the de-scaling of pipes. Larger models are available with a single forward jet which will assist in the breakup of frontal blockages. Made from stainless steel and heat treated for durability and longer life.

Models JN 10A, JN 20A, JN 30A and JN 40A are available with 4 rear jets and a single forward jet.

Gorlitz's flexible leaders help rotating nozzles negotiate difficult turns. Replacement leader JN 29A is recommended for model JN 30 FL. Replacement leader JN 39A is used with model JN 40 FL.

Nozzles machined with a 1/8" and 1/4" national pipe thread should not exceed 3000 psi. Nozzles provided with 3/8" and 1/2" national pipe thread should not exceed 4000 psi of working pressure.

- JN 10 1/8" 2-3 GPM
- JN 20 1/4" 2-4 GPM
- JN 30 3/8" 4-6 GPM
- JN 40 1/2" 8-10 GPM



- JN 10A 1/8" 2-4 GPM
- JN 20A 1/4" 2-4 GPM
- JN 30A 3/8" 4-6 GPM
- JN 40A 1/2" 8-10 GPM



4 Rear Jets with one Forward Jet



4 Rear Jets with Flexible Leader


- JN 30 FL 3/8" 4-6 GPM
- JN 40 FL 1/2" 8-10 GPM





800-620-4773


JETTER NOZZLES


Gorlitz's standard nozzles, available in brass or stainless steel, are recognized for their precision machining and short overall length to accomplish tight turns. Precise jets and smooth orifices offer rapid forward movement and superior cleaning power.


	JN 01	1/8" 2-3 GPM	JN 01B	1/8" 2-3 GPM
	JN 11	1/4" 2-4 GPM	JN 11B	1/4" 2-4 GPM
	JN 21	3/8" 4-6 GPM		

	JN 22	3/8" 4-6 GPM		
	JN 32	1/2" 8-10 GPM		


	JN 03	1/8" 2-3 GPM	JN 03B	1/8" 2-3 GPM
	JN 13	1/4" 2-4 GPM	JN 13B	1/4" 2-4 GPM
	JN 23	3/8" 4-6 GPM		
	JN 33	1/2" 8-10 GPM		


	JN 04	3/8" 4-6 GPM	JN 04B	1/8" 2-3 GPM
	JN 14	3/8" 4-6 GPM	JN 14B	1/4" 2-4 GPM
	JN 24	3/8" 4-6 GPM		

	JN 25	3/8" 4-6 GPM		
	JN 35	1/2" 8-10 GPM		

	JN 06	1/8" 2-3 GPM	JN 06B	1/8" 2-3 GPM
	JN 16	1/4" 2-4 GPM	JN 16B	1/4" 2-4 GPM
	JN 26	3/8" 4-6 GPM		
	JN 36	1/2" 8-10 GPM		

	JN 07	1/8" 2-3 GPM	JN 07B	1/8" 2-3 GPM
	JN 17	1/4" 2-4 GPM	JN 17B	1/4" 2-4 GPM

	JN 08	1/8" 2-3 GPM	JN 08B	1/8" 2-3 GPM
	JN 18	1/4" 2-4 GPM	JN 18B	1/4" 2-4 GPM

	JN 09	1/8" 2-3 GPM	JN 09B	1/8" 2-3 GPM
	JN 19	1/4" 2-4 GPM	JN 19B	1/4" 2-4 GPM

	JN 29	3/8" 4-6 GPM		
	JN 39	1/2" 8-10 GPM		

	JN 29A	3/8"		
	JN 39A	1/2"		

Gorlitz's thrust head nozzles are equipped only with rear jets for maximum forward propulsion. Suggested for general applications.

Gorlitz's laser tip nozzles are manufactured with three or more rear jets and one jet pointing forward to help cut through ice, sludge, grease, etc.

Gorlitz's corner head nozzles are provided with two rear jets for propulsion and one side jet to assist in making difficult turns.

Gorlitz's drop head nozzles are highly recommended to negotiate back to back drains or sharp turns.

Gorlitz's flex corner nozzles were designed for 3/8" and larger diameter jetting hoses. The flexible 8" long spring section including bulb is replaceable. Suggested applications include difficult turns or sharp bends.

Note: Nozzles made from brass (identified by the letter "B") should not exceed 2000 psi. Nozzles made from stainless steel should not exceed 4000 psi of working pressure unless specified otherwise. Speciality nozzles are available. Please inquire.

BALL NOZZLES

Gorlitz's ball shaped nozzles are an alternative to our drop head nozzles. The oversized ball (1.0" Diameter) shape gives added weight to clean the bottom of the pipe, negotiate bends, turns and back to back drains. Available in brass only.



Gorlitz's ball head nozzles JB 01 and JB 03 are machined with three or six rear jets for maximum forward propulsion. JB 04 and JB 06 laser tip ball nozzles are machined with three or six rear jets and one jet pointing forward.

- JB 01 1/8" 2-3 GPM (3)
- JB 03 1/8" 2-3 GPM (6)
- JB 04 1/8" 2-3 GPM (3/1)
- JB 06 1/8" 2-3 GPM (6/1)

JETTER TOOLS & ACCESSORIES

Gorlitz's adjustable in-line liquid injectors are made from brass and stainless steel components. Injectors are provided with 3/8" quick disconnect fittings and 1/4" hose barb. Maximum operating temperature is 180° F and 3000 psi of pressure.



JT 101 3-5 GPM

Gorlitz's liquid strainer assembly includes 8 feet of 1/4" diameter clear hose. The strainer is made from high impact reinforced nylon and supplied with 1/8" to 1/4" hose barb.



JT 102

Gorlitz's 4000 psi heavy duty trigger gun assembly includes a 36" lance with molded grip. The spray tip incorporates an adjustable high/low variable fan nozzle. The handle is contoured to provide comfort, safety and smooth trigger action. Fittings are 3/8" NPT inlet and 1/4" outlet.



JT 103

Gorlitz's constant speed turbo nozzle will produce up to 3500 psi of cleaning power. Applications include removal of paint, rust, scale, algae and graffiti.



JT 104

Gorlitz's super flexible premium grade PVC gloves offer an excellent wet/dry grip and are also used to handle acids and caustics. They are abrasion resistant and suited best to handle oily, greasy materials. Treated with antibacterial agents actifresh.



JT 105

Gorlitz's nozzle cleaning kit contains an assortment of specially designed and tempered wire files to clean most any nozzles orifices.



JT 106

Gorlitz's low pressure garden hose shutoff valve simplifies the water on/off procedure. Provided with standard 3/4" garden hose fitting.



JT 107