


# DuraSCOPE™

## CAMERA REELS

Proudly Designed and Manufactured in North America

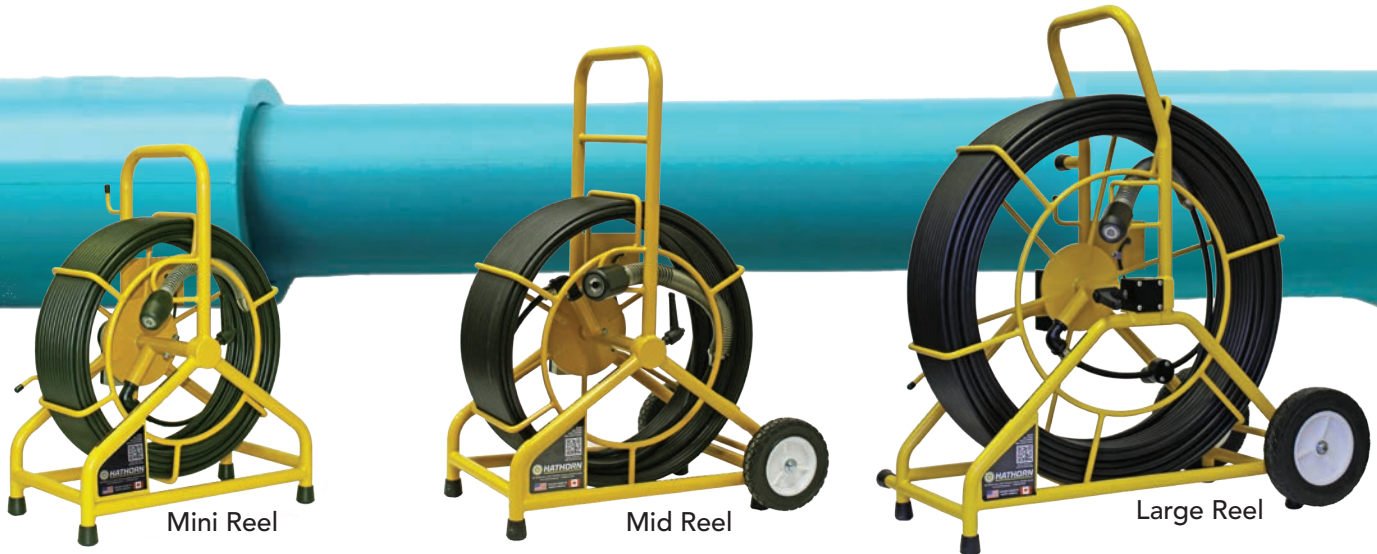

Mini Reel

Mid Reel

Large Reel

## Upgrade to DuraSCOPE™!

Hathorn DuraSCOPE™ camera reels are designed to work with any Hathorn control module, past, present or future, to future proof your investment. These municipal grade camera reels come fitted with your choice of DuraCAM™ self-leveling or straight view camera heads all equipped with super bright cool running LEDs for optimal HD picture quality. Butt welded steel frame construction, stainless steel camera heads and your choice of cable size allow you to push further than ever before and remain in the field longer with Hathorn's legendary reliability. Hathorn DuraSCOPE™ camera reels are trusted by plumbers, municipalities, general contractors, home inspectors, petrochemical companies, and mining engineers to deliver a high definition, recordable video inspection every time the camera is used.

### Features

- Compatible with all Hathorn control modules
- Self-leveling camera heads available
- Footage counter equipped
- 512hz sonde
- Industry leading HDPE premium cables



# HATHORN

**RJM Equipment Sales, Inc**  
800-620-4773 or 360-828-5732  
[www.rjmcompany.com](http://www.rjmcompany.com)  
[sales@rjmcompany.com](mailto:sales@rjmcompany.com)

# DuraSCOPE™ CAMERA REELS

## SPECIFICATIONS

- Compatibility – All Hathorn M10, M12 & M18 controllers
- Powered using Hathorn control modules
- DuraCAM™ self leveling or straight view camera heads with HD picture quality and auto-iris technology
- 1.00" - 8 dimmable cool running LEDs - 8k LUX @ 6"
- 1.23" - 12 dimmable cool running LEDs - 12k LUX @ 6"
- 1.43" - 16 dimmable cool running LEDs - 16k LUX @ 6"
- 1.68" - 20 dimmable cool running LEDs - 20k LUX @ 6"
- Choice of premium push-rod with HDPE jacket
- Sonde - 512 Hz High-power
- Operating Temperature – -30C to 60C (-22F to 140F)
- Ingress Protection of Reel & Camera Head – IPx5 to 60PSI



	Catalog#	Camera Head	Self Leveling	Rod Length	Rod Size	Min 90° Elbow	Max. Pipe Well Lit	LBS.	Dimensions
Extra Large	XLR-5568 / XLR-5568-SL	1.68"	Avail	500ft.	5/8"	3"	12"	90lbs.	33"x19"x16"
	XLR-5168 / XLR-5168-SL	1.68"	Avail	500ft	1/2"	3"	12"	75lbs.	
Large	WLR-4168-SL / WLR-4168	1.68"	Avail.	400ft.	1/2"	3"	12"	65lbs.	33"x19"x16"
	WLR-3168-SL / WLR-3168	1.68"	Avail.	300ft.	1/2"	3"	12"	55lbs.	
	WLR-2168-SL / WLR-2168	1.68"	Avail.	200ft.	1/2"	3"	12"	45lbs.	
	WLR-4143-SL / WLR-4143	1.43"	Avail.	400.ft	1/2"	3"	10"	65lbs.	
	WLR-3143-SL / WLR-3143	1.43"	Avail.	300.ft	1/2"	3"	10"	55lbs.	
	WLR-2143-SL / WLR-2143	1.43"	Avail.	200.ft	1/2"	3"	10"	45lbs.	
Mid	MR-2168-SL / MR-2168	1.68"	Avail.	200ft.	1/2"	3"	12"	42lbs.	29"x18"x15"
	MR-2143-SL / MR-2143	1.43"	Avail.	200ft	0.400"	3"	10"		
	MR-2123-SL / MR-2123	1.23"	Avail.	200ft.	0.400"	2"	6"		
Mini	MN-2135	1.35"	No	200ft.	3/8"	1.5"	6"	33lbs.	24"x18"x10"
	MN-2123-SL / MN-2123	1.23"	Avail.	200ft.	3/8"	2"	6"		
	MN-2100	1"	No	200ft.	3/8"	1.5"	3"		

\* Skids are always recommended to protect camera head. Roller skids are recommended options for pipes larger than 8"  
Find these accessories and spare parts at our website - [www.hathorncorp.com](http://www.hathorncorp.com)



Wi-Fi App available at:



# HATHORN

RJM Equipment Sales, Inc  
800-620-4773 or 360-828-5732  
[www.rjmcompany.com](http://www.rjmcompany.com)  
[sales@rjmcompany.com](mailto:sales@rjmcompany.com)